


**DE SERIES TRAVERSE BEAM ROBOT
WITH AC INVERTER OR SERVO MOTOR
TRAVERSE (X-AXIS) DRIVE**

ISO 9001

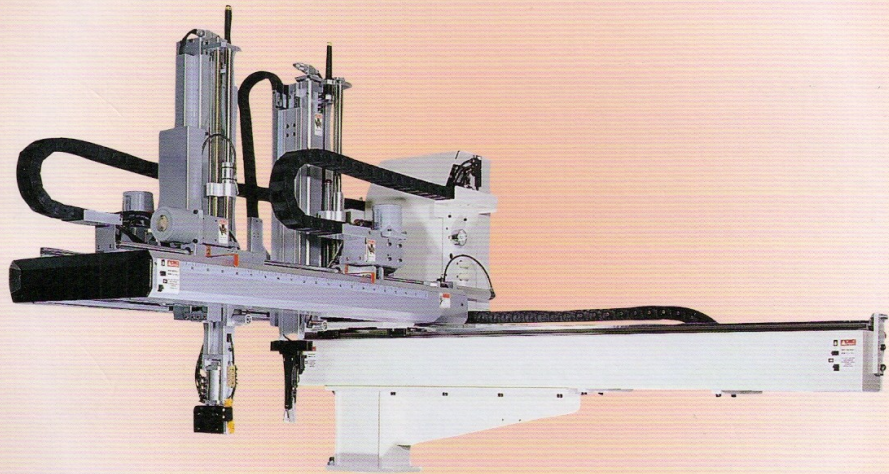

ND: 12 100 15236 TMS

**DE(S) 1000 S W - 2R**↑
1↑
2↑
3↑
4↑
5**1. MODEL**

- 1-1. DE WITH AC INVERTER MOTOR TRAVERSE DRIVE
- 1-2. DES WITH SERVO MOTOR TRAVERSE DRIVE

2. VERTICAL STROKE

- 2-1. 1000 mm
- 2-2. 1100 mm
- 2-3. 1200 mm

3. CONFIGURATION

- 3-1. S: SINGLE ARM
- 3-2. T: DOUBLE-ARM

4. W: STANDARD LOW-HEIGHT TELESCOPIC ARM DESIGN**5. 2R: OPTIONAL REMOTE STROKE ADJUSTMENTS IN STRIP AND VERTICAL DIRECTIONS**