


**BE SERIES TRAVERSE BEAM ROBOT
WITH AC INVERTER OR SERVO MOTOR
TRAVERSE (X-AXIS) DRIVE**

ISO 9001



ND: 12 100 15236 TMS

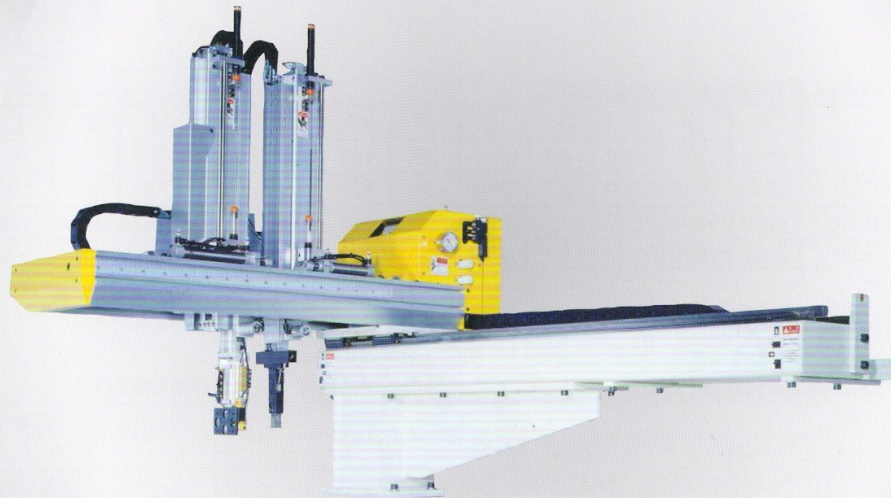

BE(S)	650	S	W
↑	↑	↑	↑
1	2	3	4

1. MODEL

- 1-1. BE WITH AC INVERTER MOTOR TRAVERSE DRIVE
- 1-2. BES WITH SERVO MOTOR TRAVERSE DRIVE

2. VERTICAL STROKE

- 2-1. 650 mm
- 2-2. 750 mm
- 2-3. 850 mm
- 2-4. 950 mm

3. CONFIGURATION

- 3-1. S: SINGLE ARM
- 3-2. T: DOUBLE-ARM

4. W: STANDARD LOW-HEIGHT TELESCOPIC ARM DESIGN**Robots For Plastic Injection Molding Machines**