


**FE SERIES TRAVERSE BEAM ROBOT
WITH AC INVERTER OR SERVO MOTOR
TRAVERSE (X-AXIS) DRIVE**

ISO 9001



ND: 12 100 15236 TMS

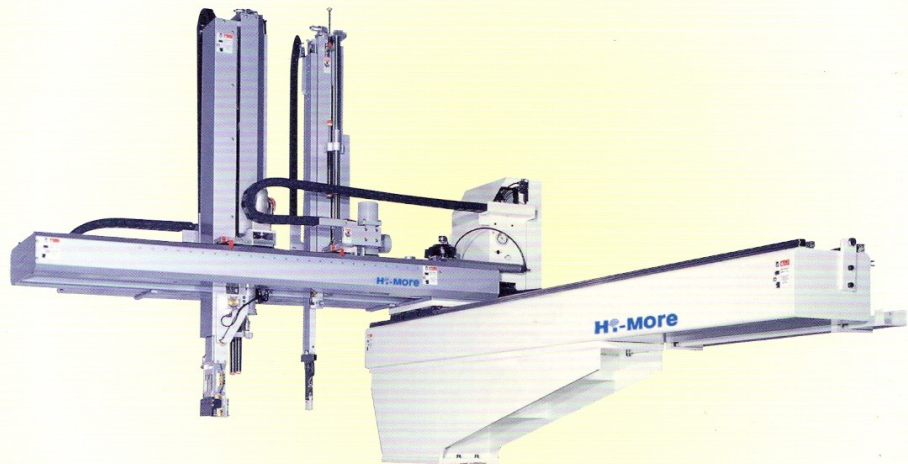

FE(S)	1300	S	W	- 2R
↑	↑	↑	↑	↑
1	2	3	4	5

1. MODEL

- 1-1. FE WITH AC INVERTER MOTOR TRAVERSE DRIVE
- 1-2. FES WITH SERVO MOTOR TRAVERSE DRIVE

2. VERTICAL STROKE

- 2-1. 1300 mm
- 2-2. 1500 mm
- 2-3. 1800 mm

3. CONFIGURATION

- 3-1. S: SINGLE ARM
- 3-2. T: DOUBLE-ARM

4. W: STANDARD LOW-HEIGHT TELESCOPIC ARM DESIGN**5. 2R: STANDARD REMOTE STROKE ADJUSTMENTS IN STRIP AND VERTICAL DIRECTIONS**